
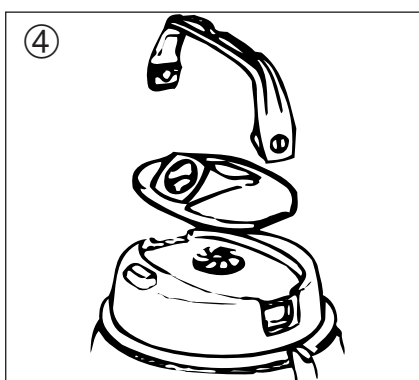
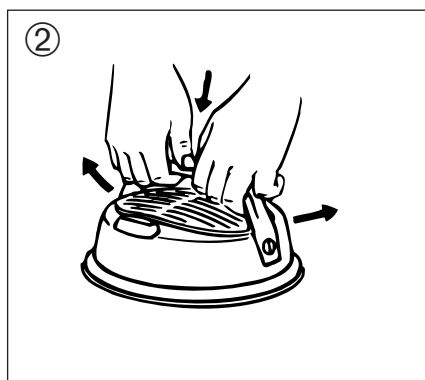
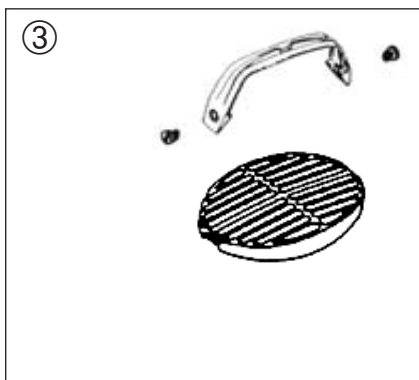


Replacement of 11562000 blow coupling

**Mounting of the blow-coupling
by removal of the grill and diffuser**

- ① Detach the handle by turning the slot of the two screws to vertical position.
- ② Release the handle by a gentle downward pressure at its centre. Press and release the handle from the recess.
- ③ Lift away the grill, the diffuser and the sound suppressor material.
- ④ Mount the blow-coupling and replace the handle. Lock the two screws by turning their slot back to horizontal position.

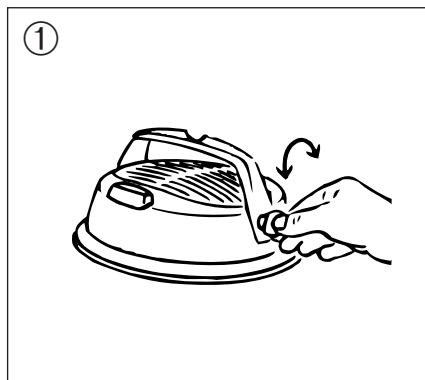

Mise en place du collecteur de soufflerie 11562000

B-1.3.5

8

Mise en place du collecteur de soufflerie par remplacement de la grille et du diffuseur

① Retirer la poignée en tournant la fente des deux vis en position verticale.

② Libérer la poignée par une douce pression verticale en son centre.

Retirer la poignée de sa cavité.

③ Enlever la grille, le diffuseur et la mousse isolante.

④ Assembler le collecteur de soufflerie et remonter la poignée. Tourner les deux vis en position horizontale pour fermer.

