
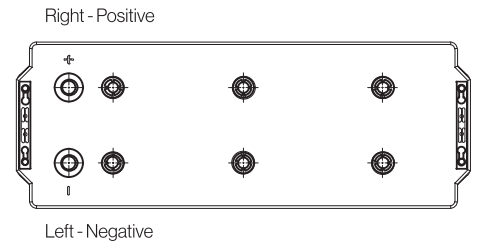


L06-12-125

Gel Leisure Bloc Battery

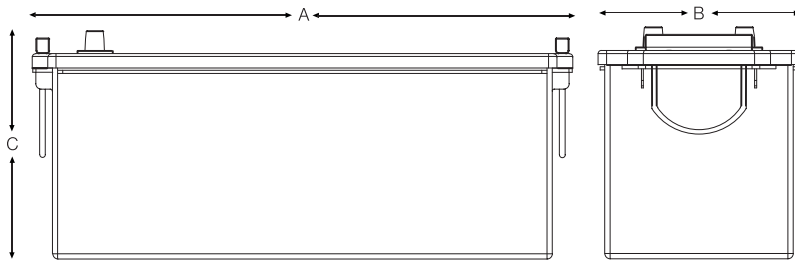

Electrical Specifications

Voltage	12V
80% DOD Voltage Cutoff	11.2V
Low Voltage Cutoff	10.8V
Self Discharge	Less than 3% per month (20°C/68°F)
Charge Temperature	Min: -10°C (14°F) / Max: 50°C (122°F)
Discharge Temperature**	Min: -40°C (-40°F) / Max: 50°C (122°F)
Storage	Min: -20°C (-4°F) / Max: 60°C (140°F)

Cell Type Ue (100%) / VPC Ref Temp	C100 1.80 25°C	C72 1.80 25°C	C20 1.75 25°C	C10 1.75 25°C	C5 1.70 25°C	C3 1.70 25°C
L06 12 125	135	129	127	121	114	108

** CAUTION: Depths of discharge, operating voltages and currents, when designing systems for use at maximum temperatures, will vary.

Mechanical Specifications

Industry Reference	DINA	
Length (A)	20.2 in	513 mm
Width (B)	7.4 in	189 mm
Height (C)	7.7 in	196 mm
Weight	99 lbs	45 kgs
Terminal (Opt'l)*	A-Pole (Industrial Terminal optional)	
Cell(s)	6	
Electrolyte	Gel	
Terminal Torque Nm	n/a	

NOTE: There is a tolerance of +/-2%.

* Including A-Terminal

Features

Maintenance-free bloc batteries in Gel technology (no topping up during lifetime)

Good high current performance for extreme operating conditions

High-class patented safety valve

700 cycles (IEC 61427 / 60896-21/22)

Capacity: 12V 56Ah - 210 Ah (C₂₀)

Valve-regulated lead-acid battery

Recyclable

Long cycle life

Low self discharge rate allows for up to 2 years shelf life

Classified as a non-spillable battery is not restricted for transportation by:

- Air (IATA/ICAO provision 67)
- Ground (STB, DOT-CFR-HMR49)
- Water (IMDG amendment 27)

Applications

Caravans

Motorhomes

Maritime


& other leisure applications

Charging profile


IU Charging I = min. 12% C₅ max. 18% C₅
U = 2.4 V per cell

IUI Charging I₁ = min. 12% C₅ max. 18% C₅
U = 2.35 V per cell
I₂ = 1.5% C₅ for max. 4 hours


Self discharge at different temperatures

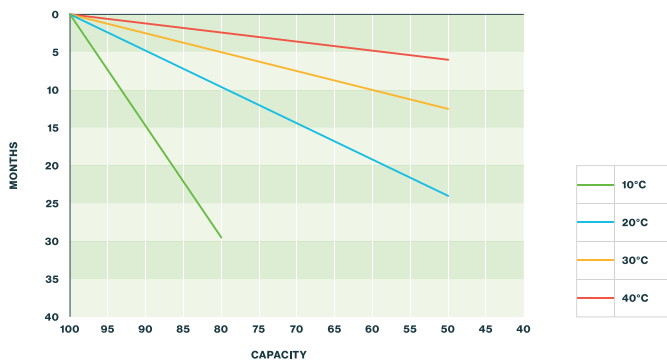


Capacity vs. temperature

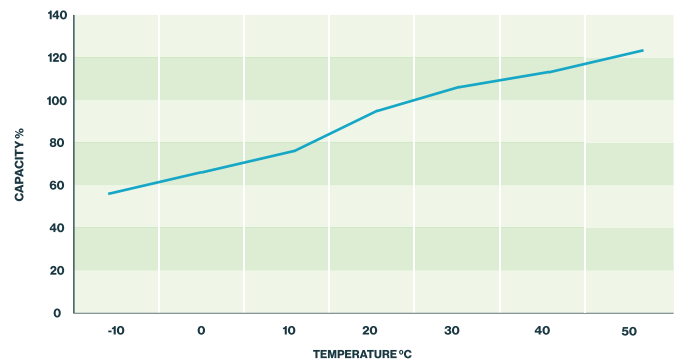

Storage: Determine the state of charge

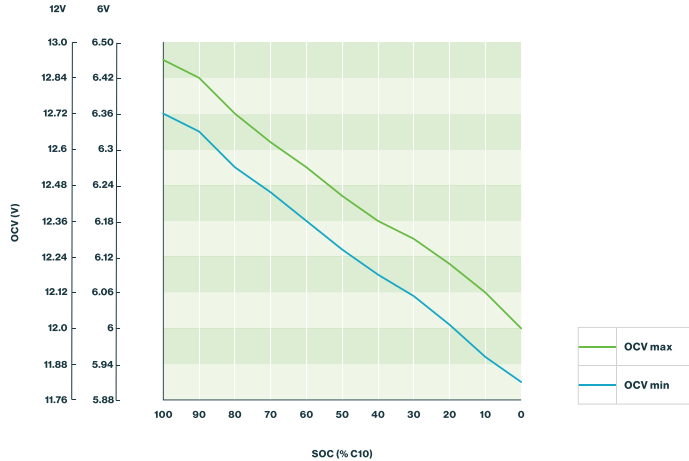

Cycle life vs. depth of discharge (25°C)

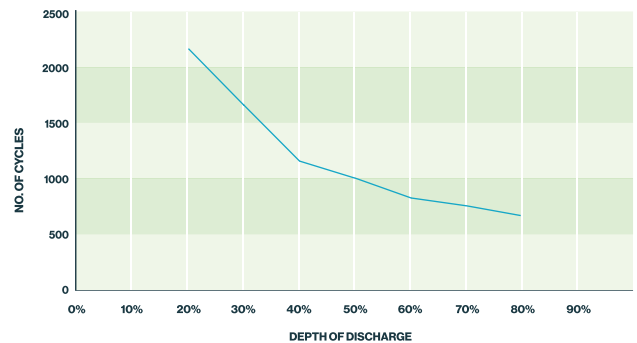

Relation between charging, voltage and temperature

